

Overview



SITRANS FUS060 is a transit time based transmitter designed for ultrasonic flowmetering with any sensor in the FUS inline series up to DN 4000. SITRANS FUS060 is engineered for high performance and is suitable for 1-, 2- and 4-tracks flowmeters.

Benefits

- Superior signal resolution for optimum turn down ratio
- Simple menu-based local operation with two-line display and four optical input elements, for unlimited use in potentially explosive atmospheres
- Self-monitoring and diagnostic
- Operate up to 4-tracks
- ATEX II 2G Ex dem [ia/ib] IIC T6/T4/T3
- Remote installation up to 120 m from sensor
- 1 analog output (4 to 20 mA) standard with HART-protocol, 1 digital frequency or pulse output, 1 relay output for limit, alarms, flow direction
- PROFIBUS PA Profile 2, 1 digital frequency or pulse output

Design

The transmitter type FUS060 is designed for remote installation in non-hazardous or hazardous areas.

The transmitter is designed for use in a flowmeter system together with sensors type SONOKIT, SONO 3300 and SONO 3100.


The FUS060 is ordered as part of a complete flowmeter system. It can be ordered separately as spare part and manually programmed with the sensor data.

Function


Displays and keypad

Operation of the SITRANS FUS060 transmitter can be carried out using:

- Keypad and display unit
- HART communicator
- PC/laptop and SIMATIC PDM software via HART communication
- PC/laptop and SIMATIC PDM software using PROFIBUS PA communication

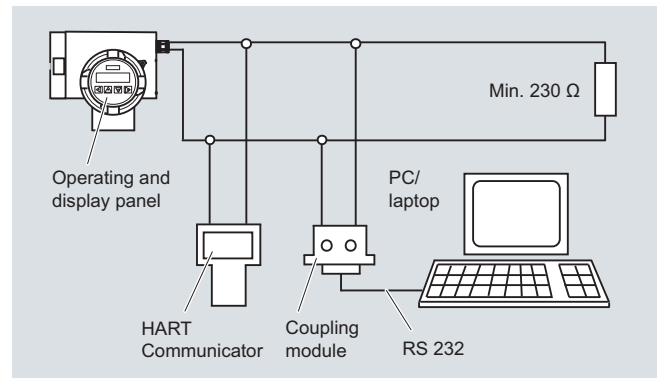


HART communication

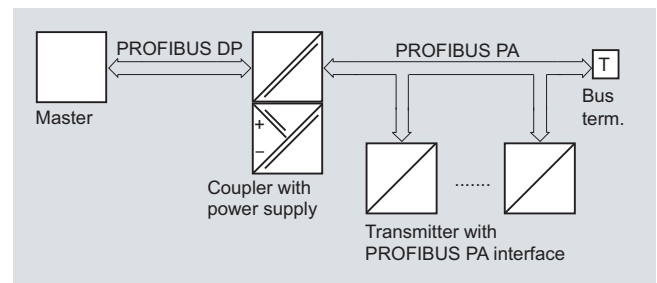

PROFIBUS PA communication

The operating and display panel permits simple operation without supplementary equipment. It is not necessary to open the housing. All changes to a setting can therefore also be carried out in the potentially explosive atmosphere.

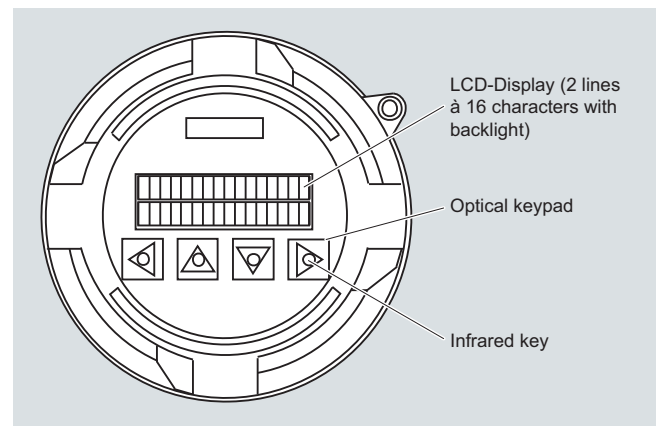

Operating and display panel

Flow Measurement

SITRANS F US Inline

Transmitter FUS060

The individual functions and parameters are selected using a hierarchical, multi-language input menu and four infrared keys. The parameters can be specifically selected and modified using codes, e.g.:

- Operating parameters such as measuring range, physical dimensions, device information
- Limits for flow, totalizer, ultrasonic velocity or ultrasonic amplitude
- Noise suppression using damping, error stages and hysteresis
- Display parameters (freely-configurable display)
- Display in volume or mass dimensions
- Density as constant input value for conversion of volume into mass dimensions
- Forward/backward measurement
- Flow direction
- Diagnostics functions and control values
- Functions of the PROFIBUS PA output:
 - flow, net quantity (volume or mass), ultrasonic velocity, ultrasonic amplitude, forward quantity (volume or mass), backward quantity (volume or mass)
- Functions of the analog output:
 - flow, ultrasonic velocity or ultrasonic amplitude
- Functions of digital output 1:
 - pulse output, frequency output, limit, flow direction or device status
- Functions of digital output 2:
 - limit, flow direction or device status
- Simulation of output signal via analog output, digital output 1 and digital output 2

The HART protocol is implemented via the analog output (current output). Using this communication facility, the device can be parameterized with a PC/laptop and SIMATIC PDM software in addition to local operation.

In the SITRANS F version with PROFIBUS PA, the analog output is replaced by the digital PROFIBUS PA output. The device can then be parameterized via PROFIBUS communication and with SIMATIC PDM in addition to local operation.

Technical specifications

Input	
Nominal diameters and measuring ranges	2-track DN 50 ... DN 4000 (optionally also for 1 and 4-track)
Max. cable length	120 m (395 ft) (shielded coaxial cable). For Ex version the transducer cable length is restricted to 3 m (9.84 ft) in order to meet requirements for electrical immunity. For 2-track and 4-track systems with sizes \geq DN 3000 cable length is restricted to 30 m (98.4 ft).
Output	
Analog output	Active current output (13.2 V < open loop voltage < 15.8 V) 4 ... 20 mA
• Signal range	20 ... 22.5 mA, adjustable
• Upper limit	3.6 mA, 22 mA, or 24 mA
• Signal on alarm	Max. 600 Ω ; for non Ex version \geq 230 Ω for HART communication \leq 330 Ω for Ex-version
• Load	Analog output omitted, is replaced by digital PROFIBUS PA interface
• Only PROFIBUS PA version:	Analog output omitted, is replaced by digital PROFIBUS PA interface
Digital output 1	
• Active or passive signal, can be configured with positive or negative logic	Active: 24 V DC, \leq 24 mA, $R_i = 300 \Omega$ Passive: open collector, 30 V DC, \leq 200 mA
• For explosion protection (ATEX version)	Passive: open collector 30 V DC, \leq 100 mA

• Only PROFIBUS PA version:	Only passive signals for digital output 1
• Output function, configurable	Pulse output <ul style="list-style-type: none"> • Adjustable pulse significance \leq 5000 pulses/s • Adjustable pulse width \geq 0.1 ms Frequency response <ul style="list-style-type: none"> • f_{END} selectable up to 10 kHz Limit for flow, totalizers, ultrasonic velocity or ultrasonic amplitude device status, flow direction
Digital output 2	
• Relay, NC or NO contact	Switching capacity max. 5 W Max. 50 V DC, max. 200 mA DC Self-resetting fuse, $R_i = 9 \Omega$
• For explosion protection (ATEX version)	Max. 30 V DC, max 100 mA DC, 50 mA AC (cf. EC-Type Examination certificate)
• Output function, configurable	Limit for flow, ultrasonic velocity or ultrasonic amplitude flow direction device status
• Only PROFIBUS PA version:	Digital output 2 omitted
Communication via analog output 4 ... 20 mA	
• PC/laptop or HART communicator with SITRANS F flowmeter	
- Load with connection of coupling module	min. 230 Ω (max. 330 Ω for Ex-version)
- Load with connection of HART communicator	min. 230 Ω
- Cable	2-wire shielded \leq 3 km (\leq 1.86 miles) Multi-core shielded \leq 1.5 km (\leq 0.93 miles)
- Protocol	HART, version 5.1
Communication via PROFIBUS PA interface	
	Layers 1 + 2 according to PROFIBUS PA Communication system according to IEC 1158-2 Layer 7 (protocol layer) according to PROFIBUS DP, EN 50170 standard
• Power supply	Separate supply, four-wire device Permissible bus voltage 9 ... 32 V See certificates and approvals
• Current consumption from bus	10 mA; \leq 15 mA in event of error with electronic current limiting
Electrical isolation	
	Outputs electrically isolated from power supply and from one another
Accuracy	
Error in measurement (at reference conditions)	
• Pulse output	$\leq \pm 0.5\%$ of measured value at 0.5 ... 10 m/s or $\leq \pm 0.25\sqrt{V[m/s]}\%$ of measured value at flow < 0.5 m/s
• Analog output	As pulse output plus $\pm 0.1\%$ of measured value, $\pm 20 \mu A$
• Repeatability	$\leq \pm 0.25\%$ of measured value at 0.5 ... 10 m/s

Flow Measurement

SITRANS F US Inline

Transmitter FUS060

Reference conditions	
• Process temperature	25 °C ± 5 °C (77 °F ± 9 °F)
• Ambient temperature	25 °C ± 5 °C (77 °F ± 9 °F)
• Warming-up time	30 min.
Installation conditions	Upstream section > 10 x DN and downstream section > 5 x DN
Rated operation conditions	
<u>Ambient conditions</u>	
Ambient temperature	
• Operation	-20 ... +50 °C (-4 ... +122 °F)
• In potentially explosive atmospheres	Observe temperature classes
• Storage	-25 ... +80 °C (-13 ... +176 °F)
Enclosure rating	IP65 (NEMA 4)
Electromagnetic compatibility	For use in industrial environments
• Emitted interference	To EN 61000-6-3 (Light industry)
• Noise immunity	To EN 61000-6-2 (Industry)
<u>Medium conditions</u>	
• Process temperature	-200 ... +250 °C (-328 ... +482 °F)
• Gases/solids	Influence accuracy of measurement (approx. max. 3% gases or solids)
Design	
Separate version	Transmitter is connected to the transducers via 3 ... 120 m (9.8 ... 395 ft) long specially shielded cables (coaxial cable) For ATEX versions mounted in the Ex area only with 3 m long cables.
Enclosure material	Die-cast aluminum, painted
Wall mounting bracket (standard and special)	Stainless steel (standard: always incl.)
Weight of transmitter	4.4 kg (9.7 lb)
Electrical connection	Cable glands (always incl.) <ul style="list-style-type: none"> • Power supply and outputs <ul style="list-style-type: none"> - 2 x M20 (HART) / M25 (PROFIBUS) or - 2 x 1/2"-NPT (HART) • Transducers/sensor <ul style="list-style-type: none"> - 2/4 x M16 or - 2/4 x 1/2" NPT
Displays and controls	
Display	LCD, two lines with 16 characters each
• Multi-display:	Flow, volume, mass flow, mass, flow velocity, speed of sound, ultrasonic signal information, current, frequency, alarm information
Operation	4 infrared keys, hierarchical menu prompting with codes
Power supply	
Supply voltage	
• Standard version	120 ... 230 V AC ± 15% (50/60 Hz) or 19 ... 30 V DC / 21 ... 26 V AC
• Ex version	19 ... 30 V DC / 21 ... 26 V AC
Power failure	No effect for at least 1 period (> 20 ms)
Power consumption	Approx. 10 VA / 10 W

Certificates and approvals

Explosion protection	ATEX II 2G Ex dem [ia/ib] IIC T6/T4/T3 T6 for media < 85 °C (185 °F) T5 for media < 100 °C (212 °F) T4 for media < 135 °C (275 °F) T3 for media < 200 °C (392 °F)
----------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Coaxial cable

Standard Coaxial cable (75 Ω)	Coaxial cable with SMB straight plug on one end for the FUS060 connector
Outside diameter	Ø 5.8 mm
Length	3, 15, 30, 60, 90, 120 m (9.84, 49.21, 98.43, 196.85, 295.28, 393.70 ft) between sensor and transmitter
Material (outside jacket)	black PE
Ambient temperature	-10 ... +70 °C (14 ... 158 °F)




High temperature Coaxial cable (75 Ω)	Coaxial cable with SMB straight plug on one end for the FUS060 connector
Outside diameter	Ø 5.13 mm (first 0.3 m (0.98 ft) part to the transducer), Ø 5.8 mm (for remaining cable to the transmitter - with SMB plug at the end) and between these is a black hot melt junction Ø 16 mm (length 70 mm)
Length	3, 15, 30, 60, 90, 120 m (9.84, 49.21, 98.43, 196.85, 295.28, 393.70 ft) between sensor and transmitter (max 3 m 9.84 ft) transducer cable length for Ex area mounted transmitters)
Material (outside jacket)	Brown PTFE (0.3 m (0.98 ft) part) and black PE (for remaining cable)
Ambient temperature	-200 ... +200 °C (-328 ... +392 °F) (brown PTFE transducer part) and -10 ... +70 °C (14 ... 158 °F) (black PE for remaining transmitter cable part)

Flow Measurement


SITRANS F US Inline

Transmitter FUS060

Dimensional drawings

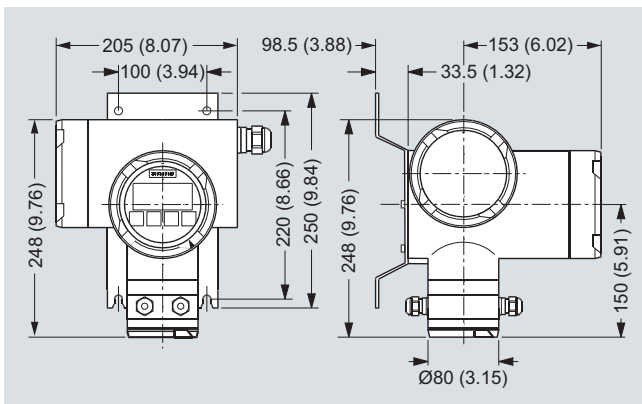


SITRANS FUS060 with standard mounting bracket, dimensions in mm (inch)

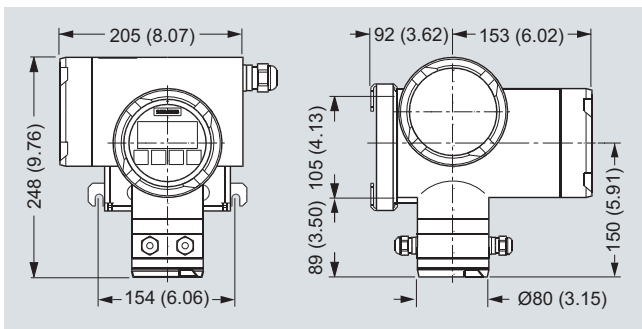

SITRANS FUS060 with optional special mounting bracket, dimensions in mm (inch)

Schematics

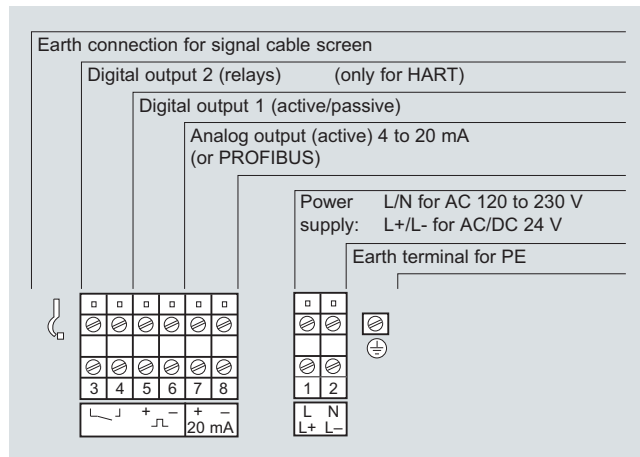

Electrical connection SITRANS FUS060

4

Transmitter FUS060 accessories and spare parts

SITRANS FUS060 transmitter, available standard and Ex versions

The transmitter configuration is made in the flowmeter order codes (together with the sensors). Here only for spare part ordering.











Description	Version	Enclosure	Supply	Order No.
FUS060, 230 V, HART, Metric cable glands	Transmitter for remote connection	IP65 (NEMA 4)	115 ... 230 V AC 50/60 Hz	7ME3050-2BA10-1BA1
FUS060, 230 V, HART, Imperial cable glands	Transmitter for remote connection	IP65 (NEMA 4)	115 ... 230 V AC 50/60 Hz	7ME3050-2BA10-1BA2
FUS060, 230 V, PROFIBUS, Metric cable glands	Transmitter for remote connection	IP65 (NEMA 4)	115 ... 230 V AC 50/60 Hz	7ME3050-2BA10-1DA1
FUS060, 230 V, PROFIBUS, Imperial cable glands	Transmitter for remote connection	IP65 (NEMA 4)	115 ... 230 V AC 50/60 Hz	7ME3050-2BA10-1DA2
FUS060, 24 V, HART, Metric cable glands	Transmitter for remote connection	IP65 (NEMA 4)	19 ... 30 V DC / 21 ... 26 V AC	7ME3050-2BA20-1BA1
FUS060, 24 V, HART, Imperial cable glands	Transmitter for remote connection	IP65 (NEMA 4)	19 ... 30 V DC / 21 ... 26 V AC	7ME3050-2BA20-1BA2
FUS060, 24 V, PROFIBUS, Metric cable glands	Transmitter for remote connection	IP65 (NEMA 4)	19 ... 30 V DC / 21 ... 26 V AC	7ME3050-2BA20-1DA1
FUS060, 24 V, PROFIBUS, Imperial cable glands	Transmitter for remote connection	IP65 (NEMA 4)	19 ... 30 V DC / 21 ... 26 V AC	7ME3050-2BA20-1DA2
FUS060, ATEX, 24 V, HART, Metric cable glands	Transmitter for remote connection	IP65 (NEMA 4) ATEX approval	19 ... 30 V DC / 21 ... 26 V AC	7ME3050-2BA21-1CA1
FUS060, ATEX, 24 V, PROFIBUS, Metric cable glands	Transmitter for remote connection	IP65 (NEMA 4) ATEX approval	19 ... 30 V DC / 21 ... 26 V AC	7ME3050-2BA21-1EA1
Operating instructions for SITRANS FUS060 transmitter	<ul style="list-style-type: none"> English German 			A5E01204521 A5E02123845








Flow Measurement

SITRANS F US Inline

Transmitter FUS060
SITRANS FUS060 spare parts

Description	Order No.	
Operating/Display module for FUS060	7ME5933-0AC00	
Electronics cover with glass plate (non Ex)	7ME5933-0AC01	
Cover for sensor cable and gasket	7ME5933-0AC02	
Cover for mains supply/communication	7ME5933-0AC03	
Standard wall mounting bracket for SITRANS FUS060 transmitter	7ME5933-0AC04	
Special wall-/pipe mounting bracket kit for SITRANS FUS060 transmitter	7ME5933-0AC05	
Safety clamp for electronic cover with glass plate (7ME5933-0AC01)	7ME5933-0AC06	
FUS060 Sensor connection PCBA, Standard versions only, 1 pc.	A5E02551331	
FUS060 Sensor connection PCBA, ATEX version only, 1 pc.	A5E02551334	
M20 cable gland set for FUS060 (M20) power and output connection, gray PA plastic, 2 pcs. • cables Ø 6 ... 12 mm (0.24" ... 0.47") • -40 ... 100 °C (-40 ... 212 °F)	A5E02246350	

Description	Order No.	
M20 cable gland set for FUS060 ATEX version power and output connection, PA plastic, 1 x in blue (ATEX Ex iEx i) and 1 x gray (ATEX Ex-e) • cables Ø 5 ... 9 mm (0.20" ... 0.35") • -20 ... 95 °C (-4 ... 203 °F)	A5E02246356	
1/2" NPT cable gland set for FUS060 (NPT) power and output connection, gray PA plastic, 2 pcs. • cables Ø 6 ... 12 mm (0.24" ... 0.47") • -40 ... 100 °C (-40 ... 212 °F)	A5E02246396	
M25 cable gland set for the FUS060 PA (M25) power and output connection, gray PA plastic, 2 pcs. • cables Ø 9 ... 16 mm (0.35" ... 0.63") • -40 ... 100 °C (-40 ... 212 °F)	A5E02246378	
M16 x 1.5 cable gland set for FUS060 (M16) sensor connection, brass chrome, 2 pcs. and 2 pcs. blind • cables Ø 5 ... 9 mm (0.20" ... 0.35") • -20 ... 105 °C (-4 ... 221 °F)	A5E02246369	
1/2" NPT cable gland set for FUS060 (NPT) sensor connection, 4 pcs. M16 bush to 1/2" NPT and 4 pcs. 1/2" NPT gray PA plastic glands • cables Ø 5 ... 9 mm (0.20" ... 0.35") • -20 ... 100 °C (-4 ... 212 °F)	A5E02247877	

4

Flow Measurement

SITRANS F US Inline

Transmitter FUS060

Cables for FUS060

Description	Length m (ft)	Order No.
Coaxial cable for FUS060, (75 Ω , max. 70 °C (158 °F), black PVC) (2 pcs.)	3 (9.84)	A5E00875101
	15 (49.21)	A5E00861432
	30 (98.43)	A5E01278662
	60 (196.85)	A5E01278682
	90 (295.28)	A5E01278687
	120 (393.70)	A5E01278698
High temp. coaxial cable for FUS060; with 0.3 m brown PTFE high temp. transducer part, max. 200 °C (392 °F) and black PVC for remaining transmitter part with SMB plug, max. 70 °C (158 °F); (impedance 75 Ω) (2 pcs.)	3 (9.84)	A5E00875105
	15 (49.21)	A5E00861435
	30 (98.43)	A5E01196952



FINE CONTROLS (UK) LTD



Fine Controls have been supplying process controls & instrumentation equipment since 1994, & now serves an ever expanding customer base, both in the UK & globally.

We offer a full range of valve & instrumentation products & services, with our product range representing leading technologies & brands:

Flow: Flow Meters & Transmitters, Flow Switches, Flow Control Valves & Batch Control Systems

Temperature: Temperature Probes & Thermowells, Temperature transmitters, Temperature Regulators & Temperature Displays

Level: Level Transmitters & Switches

Pressure: Pressure Gauges & Transmitters, Precision & High Pressure Regulators & I-P Converters, Volume boosters.

Precision Pneumatics: Pressure Regulators, I-P Converters, Volume Boosters, Vacuum Regulators

Valves: Solenoid & Pneumatic Valves, Control Valves & Positioners, Actuated Ball, Globe or Diaphragm Valves & Isolation Valves

Services: Repair, Calibration, Panel Build, System Design & Commissioning

A rotork® Brand
FAIRCHILD



bürkert



SIEMENS



alcon
SOLENOID VALVES

A rotork® Brand



MIDLAND-ACS
A rotork® Brand



Honeywell



Bourdon
Baumer Group



SOLDO
CONTROLS

A rotork® Brand



Fine Controls (UK) LTD, Bassendale Road, Croft Business Park,
Bromborough, Wirral, CH62 3QL UK
Tel: 0151 343 9966
Email: sales@finecontrols.com